


DC 485

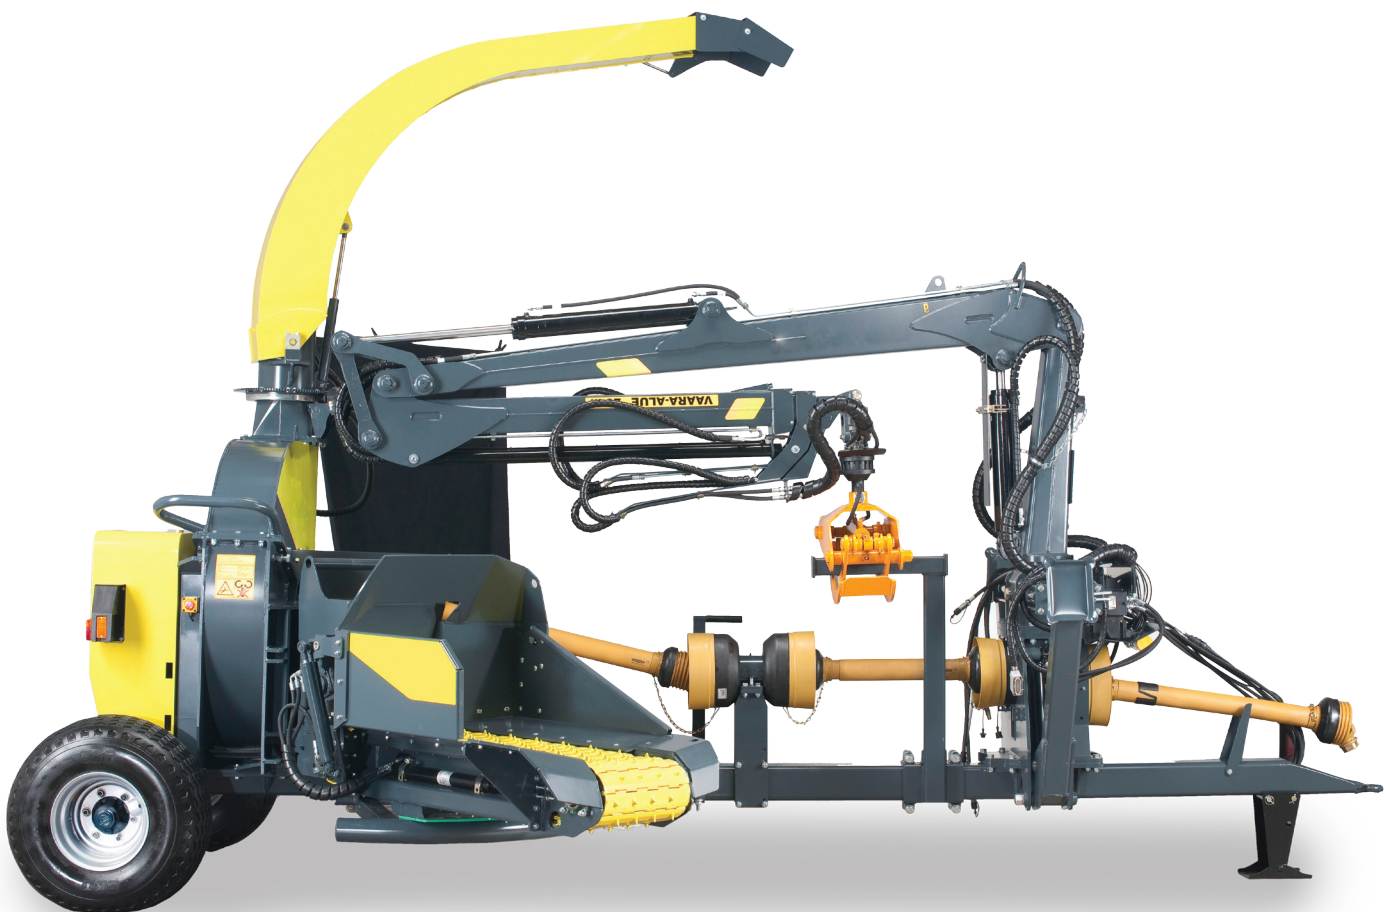

- Disc chipper
- Power take-off (PTO)/Electric
- Max. diameter 45 cm wood
- Trailer/stationary
- Also other models available:
DC185 and DC285

Specifications

Max. diameter wood	450 mm
Capacity (approx.)	20-100 m ³ /h ³
Chipper type	Disc
Infeed (W x H)	450 x 450 mm
Infeed	45 degree feeding angle
Cutting disc diameter	138 cm
Cutting disc weight	650 kg
Number of knives	2 ² - stepless knife adjustment
Knife adjustment	5 - 20 mm
Power requirement ¹	80-200 kW
Revolutions (r/min)	540-1000 rpm
Weight	2500 kg
Hydr. Feeding device / number of rollers	standard / 2
Hydr. Feeding device with own hydraulics	standard
Chute Extension	optional 0,5 m
Brush wood blades for the disc	optional
Brush wood blades for the chamber	optional
No-stress	standard
Loader feeding equipment	standard
Upper chamber tilting cylinder	optional
Hydr. lifting of the chipper feeder roller	optional
Oversize Reduction Package 4 x 5 Swing knives with screen and wear plates	optional

CGT-Models

Chipper with Power Take-Off (PTO) with hydraulic feeding rollers operated by chippers own hydraulic system.⁴

WDC 485 E

With electro motor of 110 kW with pulley, belts and own hydraulics for operating the infeed rolls and no-stress. No starters.

¹ The blade adjustment, sharpness, setting and the size and type of wood to be chipped have a significant effect to the machine's power requirement.

² A blade consisting of two parts.

³ Related to a.o. material, feeding capacity and chip size

⁴ Especially needed with crane feed models and if same tractor is using crane. Also good if chipper is used with several tractors and mixing of the oils is not wanted

